

Quadruple Level Trip Amplifier

BD140

Function: Quadruple Level Trip Amplifier from a single process signal input. The trip action can be arranged so that the Alarm condition can be above (High Trip) or below (Low Trip) each of the set points, and that the relays can be either normally energised to de-energise in the Alarm condition (Fail-Safe), or normally de-energised to energise in the Alarm condition (Non Fail-Safe).

Input option for Adder, Subtractor or Averager on mA or Voltage inputs only. The BD140 can only accept two inputs.

Options on 4 to 20mA input versions, Upscale Drive on loss of input signal.



Iss 4

Jul 14

SPECIFICATIONS

Please note that the following are typical ranges. Other ranges available, please contact sales office.

INPUTS:

D C Current

Standard Ranges

0 to 10mA into 100 ohms

4 to 20mA into 62 ohms

Optional Ranges

0 to 1mA into 100 ohms

0 to 10mA into 10 ohms

4 to 20mA into 10 ohms

Option: Upscale drive on loss of 4 to 20mA input signal

Other current inputs as required

Minimum current 10µA,

Maximum current 100mA

D C Voltage

Between -250 to +250 Volt DC

Minimum voltage span 5mV

Maximum voltage span 500V

A C Current

0 to 1A

A C Voltage

0 to 250 V

Input Impedance

1M ohms or greater

Resistance (2 wire)

Between 0 and 20K ohms

Minimum span 5 ohms

Maximum span 20K ohms

Potentiometers (3 wire)

Between 0 and 10K ohms

Minimum span 10 ohms

Maximum span 10K ohms

Resistance Thermometers

2 or 3 wire, 100 ohms at 0°C or 130 ohms at 0°C

Measurable range, -200°C to +800°C

Minimum temperature span 10°C

Maximum temperature span 600°C

Input is linearised

Thermocouples

Type B, E, J, K, N, R, S & T

Temperatures covered:

Type Range Min Temp Change

B 600 to 1800°C 400°C

E -260 to 1000°C 65°C

J -200 to 1200°C 80°C

K -260 to 1370°C 100°C

N 0 to 1300°C 150°C

R 50 to 1760°C 400°C

S 80 to 1760°C 400°C

T -260 to 400°C 100°C

Automatic cold junction compensation

Open circuit thermocouple monitoring
upscale or downscale drive

Transducer Power Supply

Unregulated nominal 24 Volt

DC25mA maximum

OUTPUTS:

Relay - Contacts

Four SPCO relay contacts -
one per level

Response Time

30mS or better

Contact Ratings

Maximum current 2A

Maximum voltage 250V AC

Maximum voltage 24 Volt DC

Switching Differential

0.5% of span approx

Switching Mode

Relay energises or de-energises on
rising or falling signal as required

Set Point

270° screw driver operated

potentiometer through front panel

Relay State Indication

Bi-colour red/green LED

Green = Stable State

Red = Alarm State

SUPPLY:

Power Supplies

115/230 Volt AC±15%

50/60 Hz

(Wire to the appropriate
terminals)

Power Required

2.5 Watts Maximum

GENERAL:

Temperature Coefficient

±0.1% of span/ Δ10°C

(for inputs > 100mV)

+ Cold junction error, for
thermocouple inputs

Operating Temperature Range

0 to +50°C

Storage Temperature Range

-20 to +60°C

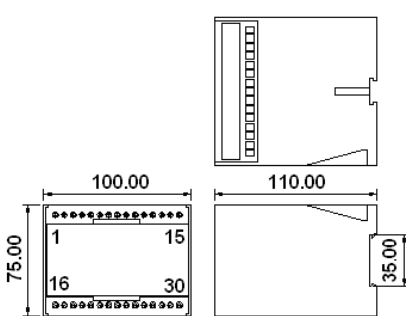

Operating / Storage Humidity Range

0 to 95% RH non-condensing

Weight

290 gms

MECHANICAL DETAILS

	Inputs	AC Current	AC Volts	DC mA	DC mV/V	T/Cs	2 Wire Slidewire	3 Wire Pot	Resistance Thermometer	Dual Input
	1 2 3	~ ~ ~	~ ~ ~	-ve +ve +ve	-ve +ve +ve	-ve +ve +ve	0% 100% 100%	0% Wiper 100%		B+ A+ Common
	4	Transducer Power Supply -ve					22	Relay N/O		
	5	Transducer Power Supply +ve					23	Common Trip 3		
	6 to 15	Unused					24	Relay N/C		
	16	Relay N/O					25	Relay N/O		
	17	Common Trip 1					26	Common Trip 4		
	18	Relay N/C					27	Relay N/C		
	19	Relay N/O					28	Power Supply 230 Volt AC		
	20	Common Trip 2					29	Power Supply 115 Volt AC		
	21	Relay N/C					30	Power Supply Neutral		

ORDERING DETAILS

a) Give identification code, i.e. BD140

b) Give power supply voltage, i.e. 230 Volt AC 50/60 Hz

c) Give details of input signal, i.e. input type (as listed above) and range.

If thermocouple input please specify upscale or downscale drive for open circuit protection

d) Give details of Options required: For thermocouple input please specify upscale or downscale drive for open circuit protection. For 4 to 20mA input, please specify if upscale drive required on loss of input signal.

e) Give details of trip action required, i.e. HHLLFS

For each setpoint:

H = High Trip = Alarm condition above the set point

L = Low Trip = Alarm condition below the set point

and for the operation of the relays:

FS = Fail Safe = Relays normally energised to de-energise in the alarm condition

NF = Non Fail Safe = Relays normally de-energised to energise in the alarm condition